
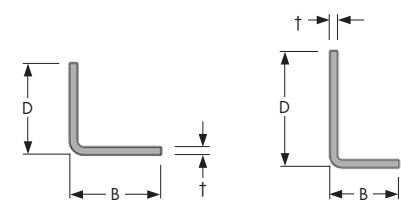


# ANGLE

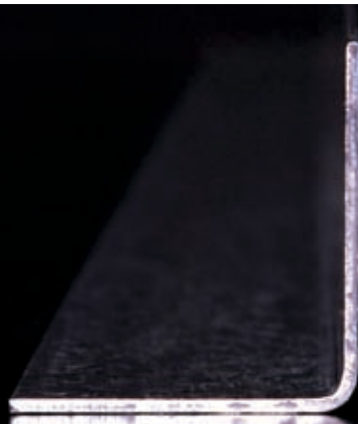

SEE OVER FOR SPECIFICATIONS

The most basic of roll formed steel, Textor Angles are typically formed at 90 degree angles. Commonly used in construction and in fabrication, Angles are formed in a number of different sizes, are available in both black and galvanised finishes, and can be customised upon request.

#### Features:

- Dimensional accuracy
- Able to be welded or bolted
- Operational excellence
- High material strength
- Corrosion resistant

#### Finishes:

- Black
- Galvanised Steel

#### Customisations:

- Cut to length
- Grade and gauge
- Coating thickness on galvanised finish
- Custom roll form and modified profiles
- Punching (round holes or slotted holes as required)

#### Availability:

- Standard sizes on site ready for dispatch
- Customisations with minimum delay

#### Example Applications:

- Construction (framing, trims, brackets, reinforcement, bridges, industrial boilers, scaffolding supports, fabricating guides for strength and durability)
- Farming (used in machinery including tractors, combines, grain bin floors, chicken roosts, grape stakes)
- Mining (typically used in conveyors)
- Transportation (packaging and edge protection for transport )
- Also extensively used for manufacturing bed frames, cot frames and desk supports

#### Support Material Available:

- CAD Drawings
- Textor Product Specifications Brochure

#### ORDER TODAY OR FOR MORE INFORMATION:

Visit our website to download support material or contact one of our helpful Sales Representatives.

[www.textor.com.au](http://www.textor.com.au)

#### Textor Metal Industries Pty Ltd

14-20 Magnesium Drive,  
 Crestmead Industrial Estate  
 Crestmead, Queensland  
 Australia, 4132

**P** 07 3803 6377

**F** 07 3803 6352


**E** [info@textor.com.au](mailto:info@textor.com.au)

#### Notes:


For customisation of Textor products please contact one of our knowledgeable staff.

Please be aware of local building requirements. If this product will be used in exposed situations within 1km of salt marine locations, or in severe industrial or unusually corrosive environments, alternative coating type may be required.

## ANGLE



1. Equal Angle



2. Unequal Angle

PROFILE CODE	PROFILE DESCRIPTION	D (MM)	B (MM)	L (MM)	GAUGE (MM)	SECTION AREA (MM <sup>2</sup> )	KG PER M	MATERIAL DESCRIPTION	SPECIAL NOTE
<b>TA2512G</b>	GALV 25X25X1.2 ANGLE	25	25		1.2	57.6	0.46608	GALV	*
<b>TA2725B</b>	BLACK 27X27X2.5 ANGLE	27	27		2.5	125	0.98125	BLACK	
<b>TA2725G</b>	GALV 27X27X2.5 ANGLE	27	27		2.5	125	0.99575	GALV	
<b>TA3225B</b>	BLACK 32X22X2.5 ANGLE	32	22		2.5	125	0.98125	BLACK	
<b>TA3225G</b>	GALV 32X22X2.5 ANGLE	32	22		2.5	125	0.99575	GALV	
<b>TA4010Z</b>	ZINCALUME 40X40X1.0 ANGLE	40	40		1	79	0.63516	ZINC ALUM	*
<b>TA4012G</b>	GALV 40X40X1.2 ANGLE	40	40		1.2	93.6	0.75738	GALV	
<b>TA4012Z</b>	ZINCALUME 40X40X1.2 ANGLE	40	40		1.2	93.6	0.74958	ZINC ALUM	*
<b>TA4030B</b>	BLACK 40X40X3.0 ANGLE	40	40		3	225	1.76625	BLACK	
<b>TA4030G</b>	GALV 40X40X3.0 ANGLE	40	40		3	225	1.788	GALV	
<b>TA4630B</b>	BLACK 46X35X3.0 ANGLE	46	35		3	225	1.76625	BLACK	
<b>TA4630G</b>	GALV 46X35X3.0 ANGLE	46	35		3	225	1.788	GALV	
<b>TA4830G</b>	G450 48X48X3.0 ANGLE	48	48		3	276	2.20064	GALV	*
<b>TA5016G</b>	GALV 50X50X1.6 ANGLE	50	50		1.6	155.2	1.24645	GALV	
<b>TA5019G</b>	G450 50X50X1.9 ANGLE	50	50		1.9	182.4	1.46736	GALV	
<b>TA5130-25</b>	BLACK 51X25X3.0 ANGLE	51	25		3	207	1.62495	BLACK	*
<b>TA5130B</b>	BLACK 51X30X3.0 ANGLE	51	30		3	225	1.76625	BLACK	
<b>TA5130G</b>	GALV 51X30X3.0 ANGLE	51	30		3	225	1.788	GALV	
<b>TA6430G</b>	GALV 64X64X3.0 ANGLE	64	64		3	366	2.90848	GALV	*
<b>TA6515G</b>	G450 65X35X1.5 ANGLE	65	35		1.5	145.5	1.178065	GALV	*
<b>TA7512G</b>	GALV 75X75X1.2 ANGLE	75	75		1.2	177.6	1.43708	GALV	
<b>TA7516G</b>	GALV 75X75X1.6 ANGLE	75	75		1.6	236.8	1.9018	GALV	
<b>TA7519G</b>	G450 75X75X1.9 ANGLE	75	75		1.9	281.2	2.26218	GALV	*
<b>TA7630G</b>	GALV 76X51X3.0 ANGLE	76	51		3	366	2.90848	GALV	
<b>TA8012G</b>	GALV 80X70X1.2 ANGLE	80	70		1.2	177.6	1.43708	GALV	
<b>TA8025G</b>	GALV 80X70X2.5 ANGLE	80	70		2.5	362.5	2.887675	GALV	*
<b>TA8525G</b>	GALV 85X50X2.5 ANGLE	85	50		2.5	325	2.58895	GALV	*

\* SUBJECT TO MINIMUM ORDER REQUIREMENTS IF NOT IN STOCK